



Electronic Security Systems



Continuous connection with Alarm Monitoring Station




Detailed SMS sending with all event log with or without AMS connection



Transfers your landline to GSM line for unlimited connection everywhere



Multi SMS software helps you minimize your costs for informing your customers about your marketing activities

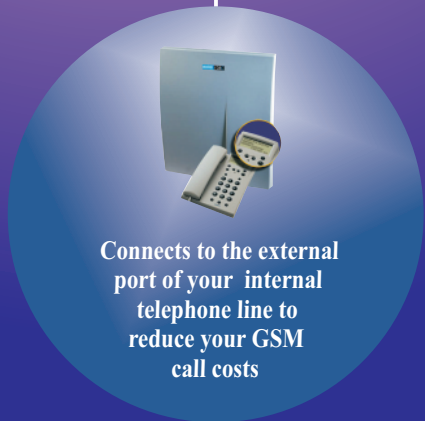

Connects to the external port of your internal telephone line to reduce your GSM call costs

GD-USB GSM DIALER FCT & MULTI SMS UNIT

Fully equipped with new generation GSM technology GD-USB GSM Dialer FCT and Multi SMS unit makes great difference with its specifications !

Specifications

- Continuous Communication with COL. and GSM lines to AMS (Alarm Monitoring Station) & SMS sending
- Transfer via GSM data & SMS during landline failure
- Quad Band 800-900-1800-1900 Mhz. GSM module
- Detailed SMS sending; including message title, Alarm event , Alarm users name and Alarm zone name
- Convert to event transfer SMS, for all alarm units with ADEMCO contact ID format, either with or without AMS connection or disconnection
- FCT unit compatible for all types of internal phone unit
- High Speed 2.0 USB computer input
- MULTI SMS sending via PC control software
- Read received SMS via PC control software
- 2x16 large screen, blue backlight LCD
- Easy to program with any telephone device
- Detailed program menu in English



Technical Specifications

Input Voltage	: 12-18 Vdc.
Current (St-by)	: 100 mA.
Current (Active)	: 400 mA.
GSM Module Band	: Quad 850,900,1800,1900 MHz.
Gsm Band Sensitivity	: 850-900 Mhz. Typ. 107dBm.
Gsm Band Sensitivity	: 1800-1900 Mhz. Typ.106 dBm.
FCT Ring Voltage	: 75 Vac. 100 mA. 25Hz.
FCT Subscriber Line Voltage	: 48Vdc. 100 mA.
Lcd Screen	: 2x16 Large screen blue backlight
Programming	: Through Subscriber Line
PC Connection	: Full Speed USB 2.0
Cable Connection	: Screw type
Thermal Protection	: + 125°C
Working Temperature	: -20 + 60 °C
Stainless Steel Case Dimensions	: 285 x 128 x 52mm.
Weight	: 980 Gr.
Antenna Dimensions	: 5 cm. or 3mt. Anten. with cable



Compatible with all Alarm Systems
with or without AMS connection
converts all event log in the Alarm
System to SMS messages
for a safer home or office



Made in Turkey



TURKISH PATENT INSTITUTE

Electronic Security Systems